



L218 Wireless Indicator

Features



Easy to use



Light & thin




Embedded Support

Advantages


- Enhance corporate image
- Low-power Consumption
- Simple Usage & Flexible Application
- Energy Saving

Specifications

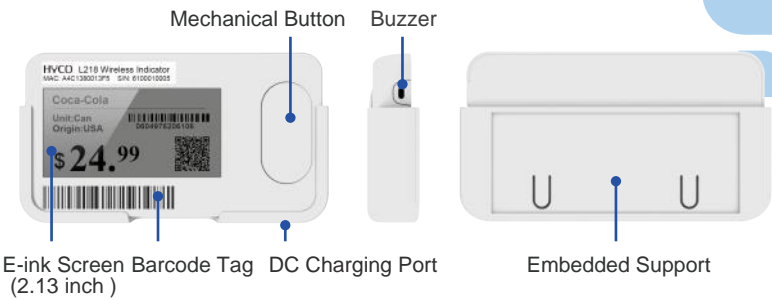

Model	L218
Weight	<45g
Dimensions (W*D*H)	86mm*47mm*12.8mm(without embedded support) 89.3mm*48.6mm*14.6mm (with embedded support)
LED Indicator	RGB LED (programmable)
Mechanical Button	The inclusion of a mechanical button that responds to both short and long presses enables the device to perform various interactive functions. This feature enhances the system's usability and simplifies its management.
Buzzer	Supported
Communication	GFSK@433MHz Wireless
Installation	Embedded support
Battery (Replaceable)	1000mAh 2.5mm DC
Charging Time	2.5 hours
Battery Life	12 months
Display	2.13-inch e-ink screen (122*250 Resolution)
Extended Storage	1-8MByte
Recharging	With centralized charger (supports charging 10 devices at the same time)
Operating Temperature	-10°C to 50°C(14°F to 122°F)
Humidity	0%-80%RH (non condensing)

Applications



Delivery



Warehousing



Assembly Shop



Pharmaceutical